




User Manual


Product Overview

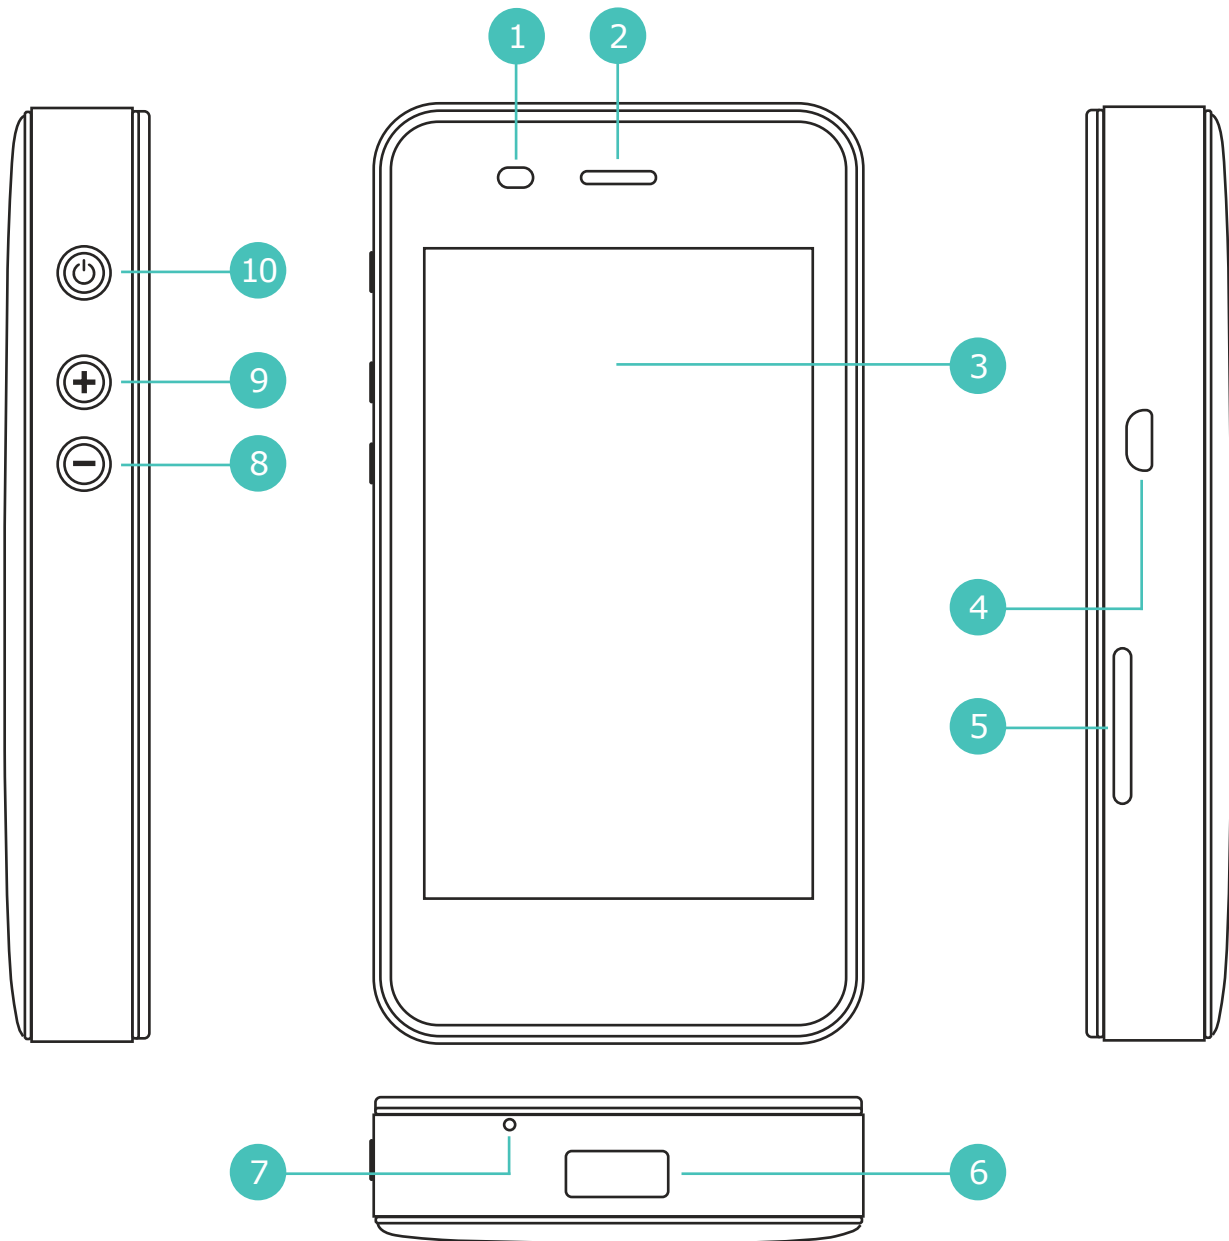

- ① Proximity Sensor
- ② Receiver /Speaker
- ③ LCD Touch Display
- ④ Micro USB Port (Input)
- ⑤ SIM Slots
- ⑥ USB Port (Output)
- ⑦ Microphone
- ⑧ Volume Down Button
- ⑨ Volume Up Button
- ⑩ Power Button


Chargers with an output of 5V-2A are recommended.

User Interface Homescreen

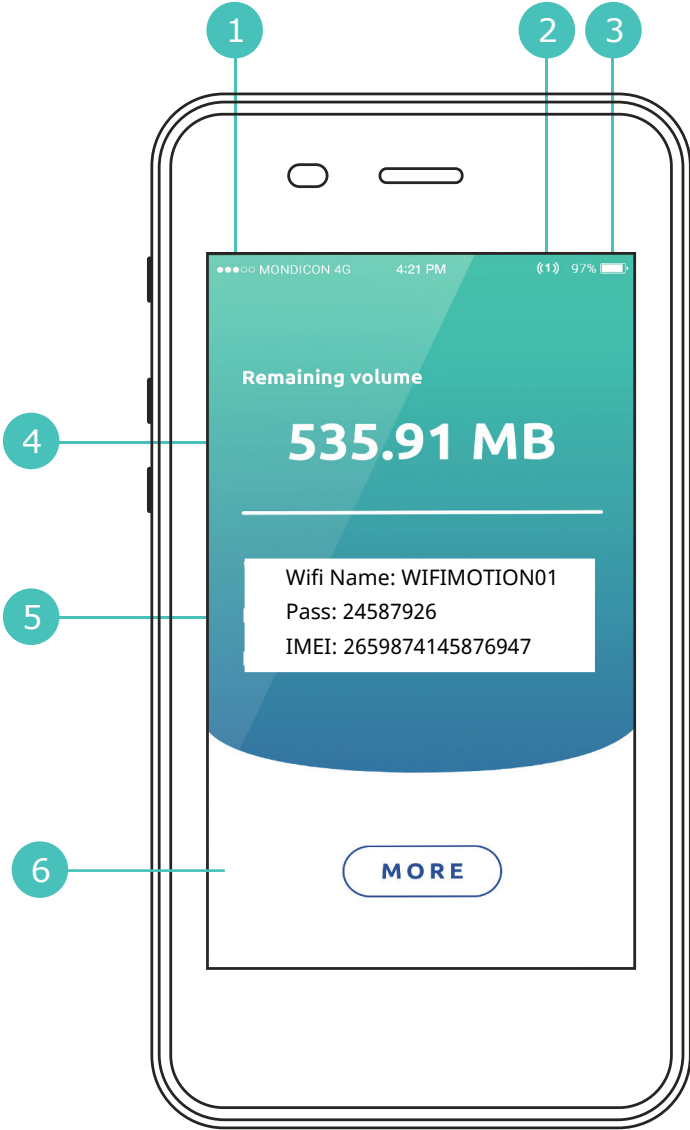

- 1 Cellular signal strength
- 2 Number of devices connected to hotspot
- 3 Current battery charge rate
- 4 Remaining data on cloud SIM
- 5 Hotspot information
- 6 Settings menu

User Interface Settings Menu

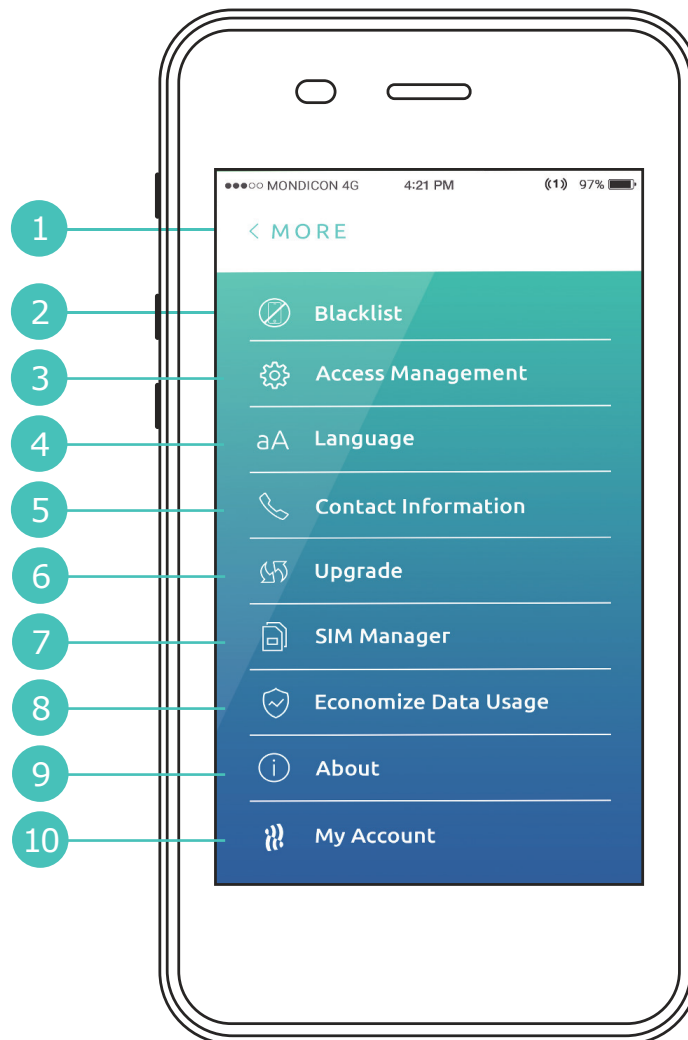

- 1 Back to home screen
- 2 Overview of devices on the blacklist
- 3 Add a connected device on the blacklist
- 4 Change the language
- 5 Contact information Wifimotion
- 6 Check and upgrade to new version of the software
- 7 Activate the embedded cloud (v)sim or one of the SIM slots
- 8 Enable this function to prevent massive data usage because of updates and synchronisation
- 9 Technical specifications
- 10 Activate Cloud VPN and purchase worldwide data plans

Product Introduction



Brand

Wifimotion

Box Content

Device, User Manual, Micro USB cable, SIM-slot peg

Note

Charging adapters 100-240V~50/60Hz 0.15A are recommended.

Technical Specifications

- LTE FDD: Band 1/2/3/4/5/7/8/9/17/19/20
- LTE TDD: Band 38/39/40/41
- WCDMA: Band 1/2/4/5/6/8/9/19
- CDMA/EVDO: BC0 BC1
- GSM: 850/900/1800/1900 MHz
- Max Upload Speed: 50Mbps
- Max Download Speed: 150Mbps
- Wi-Fi: IEEE802.11b/g/n
- Screen Size: 4.0 inch
- Standard USB 2.0 port
- Micro USB
- Battery Capacity: 5350 mAh (3.8V 20.33Wh)
- Input/Output: DC 5V 1A
- Size: 126.5*65*19mm
- Weight: 240g (net)

Quick Start Guide




Step 1

Turn on your Wifimotion by pressing the power button for 3 seconds.

Step 2

Turn on WiFi on your WiFi device and connect to the WiFi network of your Wifimotion. The Wifimotion WiFi network name can be found via the 'Hotspot' button on your Wifimotion. Insert the WiFi password on your WiFi device and enjoy the internet once it's connected.

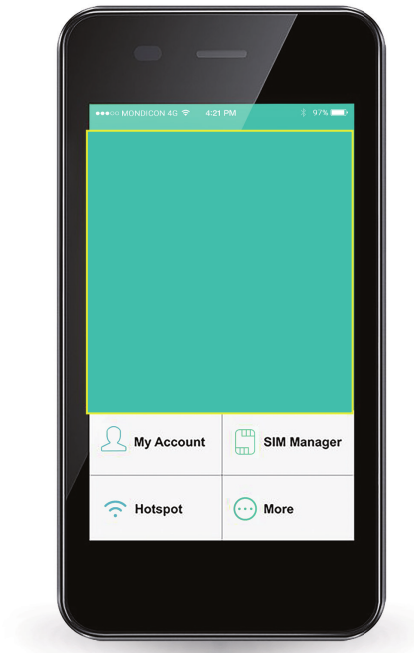

Powerbank Functionality

Connect the charging cable to the USB port (output) of your Wifimotion, and connect the other end to the smart phone, the powerbank will work automatically no matter if your Wifimotion is on or off (the battery level has to be above 30% for the powerbank functionality to work).

If your Wifimotion works properly, but the powerbank does not work, the reasons could be:

- 1 The charging cable is not recognized. Please try again with the original Wifimotion charging cable.
- 2 The charging cable is not working. Please try with a different charging cable.


If after these steps, the powerbank still does not work, please contact customer service.

Local SIM Card Guide




The use of your own SIMs

- 1 Wifimotion supports the use of other SIM cards, the device has two SIM slots (both are Nano SIM Slots).
- 2 Open the SIM card tray with the SIM-slot peg, and insert the SIM card as shown in the picture below. Please contact customer service if you encounter any issues.
- 3 Please remove the PIN code of the SIM card before you insert it, as *SIM cards with PIN codes are not supported by Wifimotion*

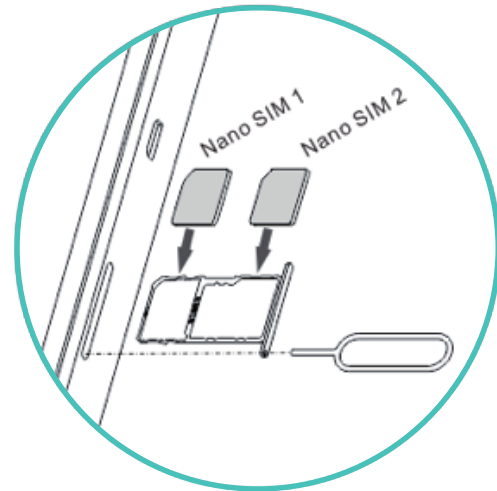

Tip

There are multiple sizes of SIM-cards. Standard (Mini) SIM, Micro SIM and Nano SIM cards are shown on the right:

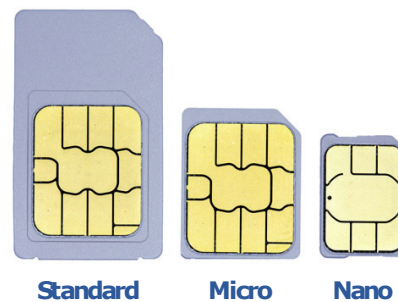

APN Settings

Follow the steps below to set APN for local SIMs on Wifimotion:

- 1 Insert the SIM, and select it in SIM Manager page;
- 2 Click SIM 1 or SIM 2 in the menu, under SIM Manager;
- 3 Click on the active SIM card;
- 4 Click 'Access Point Name (APN)' and fill APN settings to finish the settings.

① **How long does it take to fully charge the Wifimotion?**

Approximately 7,5 hours. So when you are on a trip, we advise you to charge your device during each night.

② **How long can my Wifimotion work continuously?**

Approximately 15 hours with a fully charged battery. The powerbank can only be used when the Wifimotion is charged above 30%.

③ **How many WiFi devices can I connect to the Wifimotion the same time?**

Your Wifimotion can support up to 5 devices at the same time.

④ **How long does it take to connect to the internet once switched on?**

It depends on the local network conditions, normally it will take up to 2 minutes. If you use the Wifimotion for the first time in a country, it may take up to 5 minutes.

⑤ **What should I do if the Wifimotion stops responding?**

You can reboot the device by pushing the power button for a few seconds, and click the reboot button on the touch screen. For a hard reset, press the power button for 20 seconds

⑥ **Which countries are included in the data plans?**

More than 100 countries, including China, USA, Australia, Japan, Brazil and all of Europe. We have included all countries where people travel the most in the world. Countries are subject to change. You can always find the most recent overview of supported countries at our website www.wifimotion.com Please drop us an email (info@wifimotion.com) if the country of your preference is not included in the list. We are keen to support your inquiries and willing to look at alternative options to help you. However, our services and rates depend on the local availability of networks.

⑦ **How does the unlimited data bundle works?**

With the unlimited bundle, you receive 2 GB of high speed data each month. After two GB of usage per month, the speed decreases to a level where texting and emailing is still possible.

Do you want to use highspeed internet again? You can buy extra data bundles via the touchscreen and instantly enjoy high speed internet. Or you can wait until the next month starts, where there will be 2 GB of high speed internet available again.

8 **What internet speed does the Wifimotion offer?**

Wifimotion offers high-speed internet, up to 150 mbps. The speed depends on the strength of the local network.

9 **Which payment methods are supported when adding a data bundle?**

Creditcard (Visa, Mastercard, American Express and Discovery) and PayPal.

10 **Does Wifimotion come with a monthly subscription?**

No. All prices are one-off prices. You won't be surprised by any monthly costs. We don't want to lock-in our customers, so we offer you maximum flexibility. You can even use your own SIM cards.

For more info, please visit [Wifimotion.com](https://wifimotion.com) or contact the support desk: info@wifimotion.com

Warning



Specific Absorption Rate (SAR) information. SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value, in general, the closer you are to a wireless base station antenna, the lower the power output.

Before a new device can be made available for sale to the public, it must be tested and certified by the FCC that it does not exceed the exposure limit established by the FCC. Tests for each device are performed in positions and locations as required by the FCC. For body worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause.

Undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and complies with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is suggested to try to correct the interference by the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit to the receiver.
- Consult the manufacturer or an experienced radio/TV technician for help.

Information on the disposal and recycling of the device

This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset, adapter, or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal waste and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, household waste disposal service, or retail store.

Disposal of the device and batteries (if included) is subject to WEEE.

Directive Recast (Directive 2012/19/EU) and Battery Directive (Directive 2006/66/EC). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risk of any hazardous substances that may be present.



WEBSITE

www.wifimotion.com

E-MAIL

info@wifimotion.com

Madrid
Dirección: Pº de la Castellana 194
28046, Madrid, España.
Teléfono: 900922022 / 607075554

Barcelona
Dirección: Rambla del Prat 2, Pral 1ª
08012 Barcelona
Teléfono: 697493868

México
Dirección: Durango 263, Piso 10 Col. Roma,
México D.F. 06700